

# LED FRESNEL 150 TW

## LEDFRE130

The LED Fresnel 150 TW is a high CRI tuneable white 2700K to 4200K fresnel with 10° to 50° manual zoom. With a powerful 100W LED engine it is comparable to a 750W incandescent fresnel. The LED Fresnel 150 TW is the professional choice for powerful "warm" lighting of large theatre venues, exhibitions and TV studios with high demands on the quality of lighting.



# Specifications

## Optical System

Lamp Source	100W LED
Beam Angle	10° to 50°
CRI	> 95
CCT	2700K to 4200K



## Electrical Specifications

Voltage	100 – 240VAC 50/60Hz
Max Power	120W
Power Connection	True1 In/Out
Signal Connection	5pin DMX In/Out

## Work Environment

Ambient Temperature	0°C to 45°C
IP Rating	IP20

## Photometrics

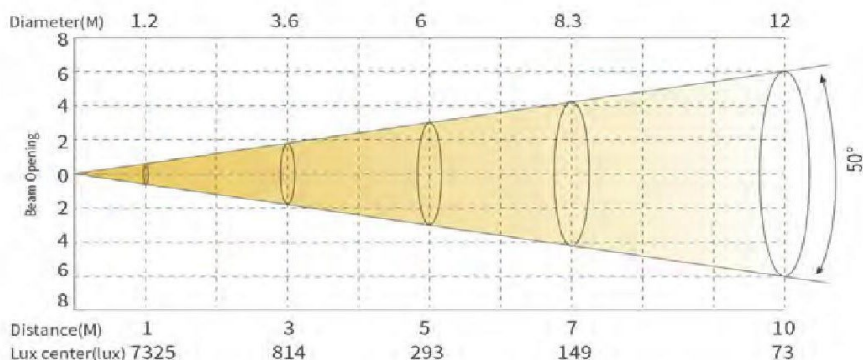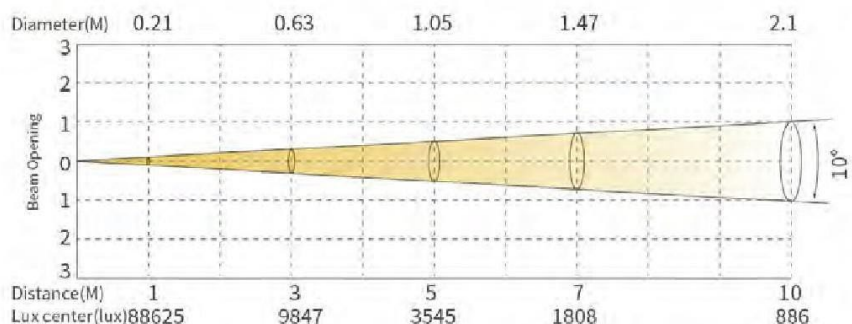

## Control System

Dimmer	0 to 100% 16-bit
Cooling	Forced Convection
Control	DMX512, RDM
Manual Control	Dimmer & CTC rotary knob
Display	On board control, 0-25Hz strobe
Personality	UNO(1), DOS(2), VW.D(3), VW.F(6), STD.P(8)

## Appearance

Size	321 x 274 x 363mm
Weight	5.3kg
Casing	Flame retardant plastic
Colour	Black

## Optional Accessories

**LEDFRE135-** Barndoors