

# SHOWPRO

# EK

## BLINDER II C

### LEDPAR380

An innovation in its class, the Blinder II C features a dual LED engine, utilising both Warm White and RGBA modules. It boasts over 500W of power, a 2800K to 10000K tuneable white, and full colour mixing capabilities in a blinder package. It showcases multiple control modes for increased flexibility, and allows the user to set fixed colour, tungsten emulation curves with the onboard control. Packaged in a compact and lightweight design, the Blinder II C is a versatile, flexible blinder for use in any situation.



## Specifications

PHOTOMETRICS	
Light Source	380W RGBA 4 in 1 WW: 90W LED
Color Temperature	W:3148 2800~10000K
Luminous Flux	6020LM
CRI	≥90
Beam Angle	59.3°
Field Angle	100°
LED Life	20000 hours

CONTROL	
Mains	100~240VAC, 50~60Hz
Power	122W
Power Connections	PowerCon IN+Out, linking up to 21pcs
DATA Connections	5 pin DMX In+Out, linking up to 32pcs


CONTROL	
Protocol	DMX 512, RDM
DMX Channel	1CH/5CH/7CH/10CH/12CH/ 13CH/15CH/28CH
Display	LCD Screen

KEY FEATURES	
Tilt	360°
Strobe	0~30Hz
Dimmer	4 diming curves


PHYSICAL	
Housing	Magnesium alloy
IP Rated	IP28
Ambient Temperature	0°C ~ +40°C
Cooling	Natural heat dissipation
Dimension	415*93.7*231.7mm
Weight	3.6kg

## Photometrics

Beam Angle 59.3°

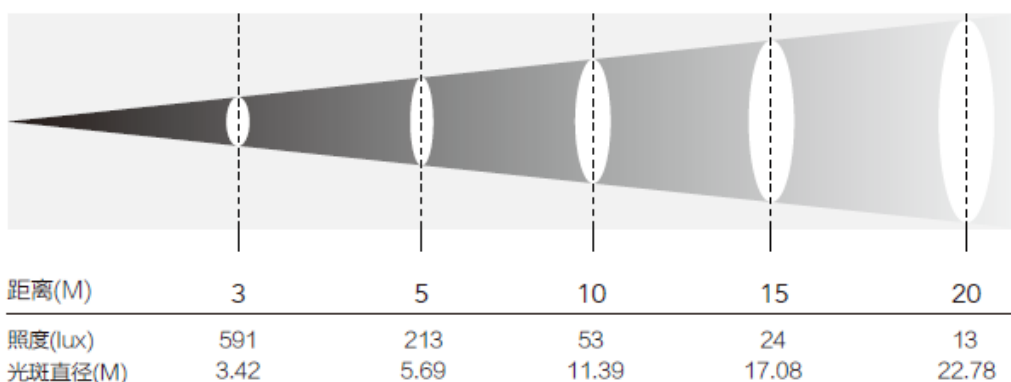

## Dimensions

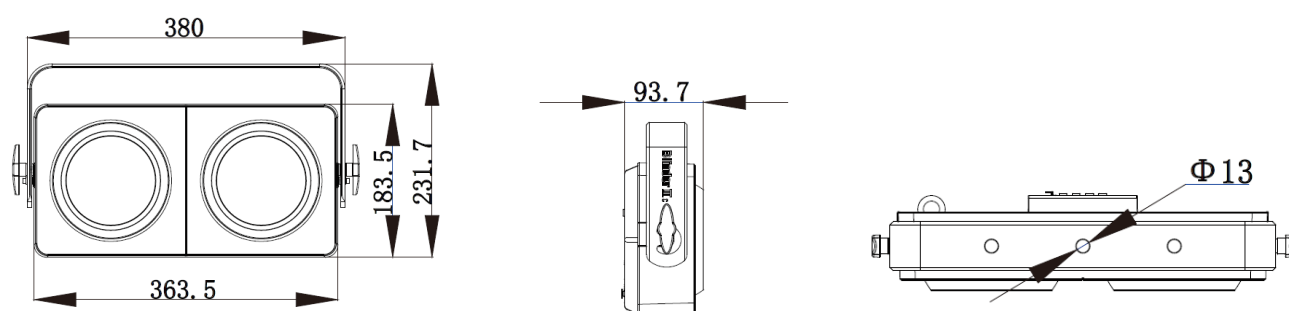

**SHOWPRO**

SYDNEY  
+61 2 9748 1122

MELBOURNE  
+61 3 9681 7511

BRISBANE  
+61 7 3267 3177

PERTH  
+61 8 9248 8119

AUCKLAND  
+64 9 869 3293

**SHOW**  
TECHNOLOGY